GLACIER










24"x 48" Field Tile in Piombo Corten Brick Mosaic in Magnesio

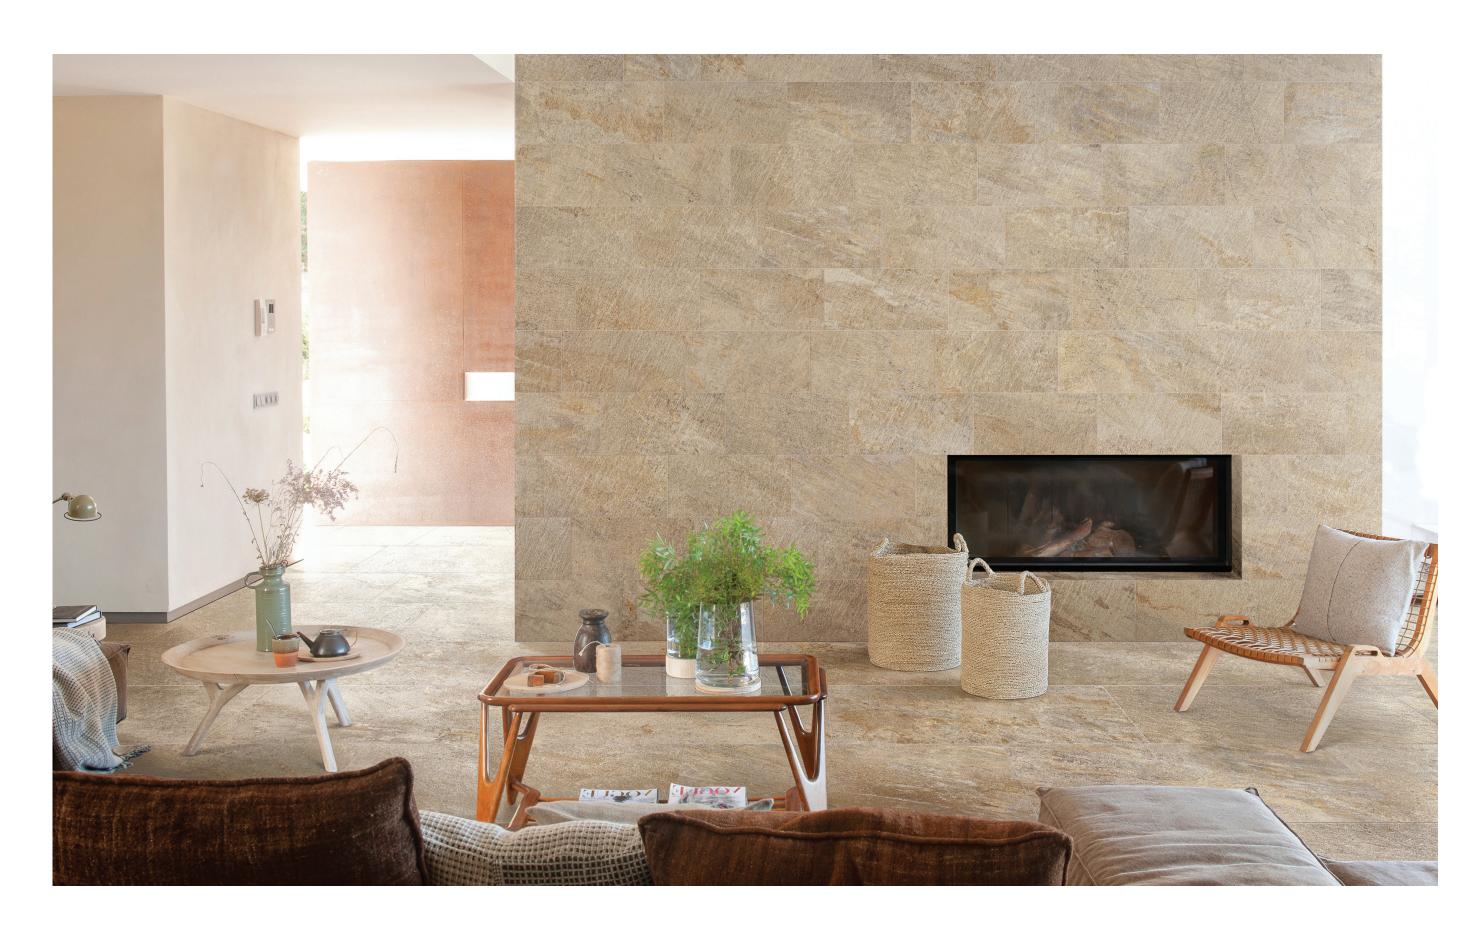





12"x 24" | 24"x 48" Field Tile in Magnesio Brick Mosaic in Magnesio

AVAILABLE STOCKED ITEMS:

9mm Field Tiles							
SIZE	EDGE	FINISH	COLORS				
12"x 24"	Rectified	Matte	Magnesio Oro Platino Piombo				
9mm Mosaics							
SHEET SIZE	TYPE	FINISH	COLORS				
12"x 12"	2"x 2" Mosaic	Matte	Magnesio Oro Platino Piombo				
12"x 24" Sheet	Brick Mosaic	Matte	Magnesio Oro Platino Piombo				

AVAILABLE SPECIAL ORDER ITEMS:

SIZE	EDGE	FINISH	COLORS		
12"x 24"	Rectified	Roccia	Magnesio Oro Platino Piombo		
24"x 24"	Rectified	Matte	Magnesio Oro Platino Piombo		
24"x 28"	Rectified	Matte Grip	Magnesio Oro Platino Piombo		
	or Pavers + Special S	<u> </u>	Magnesio Oto Flatino Floribo		
	-	•	201000		
SIZE	EDGE	FINISH	COLORS		
24"x 24"	Rectified	Textured	Magnesio Oro Platino Piombo		
24"x 36"	Rectified	Textured	Magnesio Oro Platino Piombo		
24"x 48"	Rectified	Textured	Magnesio Oro Platino Piombo		
32"x 32"	Rectified	Textured	Magnesio Oro Platino Piombo		
Path A + B	Rectified	Textured	Magnesio Oro Platino Piombo		
Path C	Rectified	Textured	Magnesio Oro Platino Piombo		
9mm Mosaics	S	'			
SHEET SIZE	TYPE	FINISH	COLORS		
11"x 15.375" Sheet	Corten Brick Mosaic	Matte	Magnesio Oro Platino Piombo		
Trim Pieces					
SIZE	TYPE	FINISH	COLORS		
3"x 24"	Bullnose	Matte	Magnesio Oro Platino Piombo		
12"x 24"	Gradino	Matte	Magnesio Oro Platino Piombo		
13"x 24"	Scalino	Matte	Magnesio Oro Platino Piombo		
13"x 48"	Scalino	Matte	Magnesio Oro Platino Piombo		
13"x 13"	Scalino Angolare	Matte	Magnesio Oro Platino Piombo		
6"× 24"	Elemento L	Roccia	Magnesio Oro Platino Piombo		
	Elemento L		Magnesio Oro Platino Piombo		

⁻ All sizes are NOMINAL

TRIM PIECES





Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.



MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile		2" 4"		1³/ ₈ ″x3″ 2″x4″
	a smaller size in any length and width	BRICKS		DIAMONDS	
	combination with a 1" minimum.		1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
○ Diamond	4"			* * * * * * * * * * * * * * * * * * * *	⁵ / ₈ "x4"
		OCTAGONS		HEXAGONS	
\ \ \ \ Hexagon	6"		2"		411.11
Chevron	2"×12" 6"×24"		w/ 0.6" Squares		1 ¹ / ₈ " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"

^{*}Other sizes available upon request

2"X2" MOSAIC









Magnesio

0ro

Platino

Piombo

BRICK MOSAIC









Magnesio

Oro

Platino

Piombo

CORTEN BRICK MOSAIC









Magnesio

0ro

Platino

Piombo

PAVER SPECIAL SHAPES





Path A+B

Path C



GLACIER

Color Body Porcelain Tile

Features	Test Method	Va	Value	
reatures	iest Methou	$7~\text{cm} \leq N < 15~\text{cm}$	N ≥ 15 cm	
Length and Width		± 0.4 mm	± 0.3% ± 1mm	
Thickness	ISO 10545-2	± 0.5 mm	± 5% ± 0.5 mm	
Straightness of Sides	150 10545-2	± 0.4 mm	± 0.3% ± 0.8 mm	
Rectangularity		± 0.4 mm	± 0.3% ± 1.5 mm	
Water Absorption	ISO 10545-3	≤ 0	.1%	
Breaking Strength		Matte Grip Roccia	Pavers	
Broaking Grongin	ISO 10545-4	≥ 1500 N	≥ 10000 N	
Bending Resistance		≥ 40 N/mm²	≥ 45 N/mm²	
Impact Resistance	ISO 10545-5	≥ 0	≥ 0.55	
Deep Abrasion Resistance	ISO 10545-6	≤ 150	≤ 150 mm³	
Coefficient of Linear Thermal Expansion	ISO 10545-8	≤ 7	≤ 7 MK ⁻¹	
Thermal Shock Resistance	ISO 10545-9	Resistant		
Moisture Expansion	ISO 10545-10	≤ 0.0	01 %	
Frost Resistance	ISO 10545-12	Resis	stant	
Resistance to Household Chemicals and Swimming Pool Salts		Clas	ss A	
Resistance to Low Concentrations of Acids and Alkalis	ISO 10545-13	L	LA	
Resistance to High Concentrations of Acids and Alkalis		Н	НА	
Stain Resistance	ISO 10545-14	Cla	ss 5	
Bond Strength	nd Strength EN 1348 (12004) ≥ 0.1 N/mm² (Class C2)		n² (Class C2)	
Dynamic Coefficient of Friction (DCOF)	ANSI A137.1	≥ 0.50 Wet		
VOCs	-	No Emissions		





LEED V4 This collection of porcelain floor and white body wall tiles can be used in projects that follow the guidelines of th GREEN BUILDING COUNCIL, which promotes the independent certification system LEED BD&C v4 (Leadership in Energy and Environmental Design, Building Design & Construction), whose parameters establish precise criteria for the design and construction of buildings that are healthy, energy efficient and with low environmental impact. All products in this collection will therefore contribute to obtaining the LEED V4 rating of buildings, in relation to different areas: Sustainability of the Site, Materials and Resources, Internal Environmental Quality.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Color Body Porcelain Tile
- Matte | Grip | Roccia | Textured Finishes
- 9mm | 20mm Thickness
- Rectified Edge
- V3 Moderate Variation
- Frost Resistance = Yes



www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com