

SYMMETRY



SOFTDRINKS

APFELSCHORLE 0.3	2.80
LEMONAID 0.3	2.80
CHARITEA 0.3	3.50
COKA COLA 0.2	2.40
FRITZ KOLA 0.2	2.40
PETER PAN 0.3	4.50

For more product information, scan the QR code.





2.5" x 10" Picket in Obsidian



2.5" x 10" Picket in Ash Rose



2.5" x 10" Picket in Forest



2.5" x 10" Picket in Mineral Grey


AVAILABLE STOCKED ITEMS:

8.2mm Picket Field Tiles		
SIZE	FINISH	COLORS
2.5" x 10"	Matte Shiny	Pure White Coconut Milk Ash Rose Aqua Blue Stone Forest Mineral Grey Obsidian

All Sizes are Nominal.



2.5"x 10" Picket in Coconut Milk

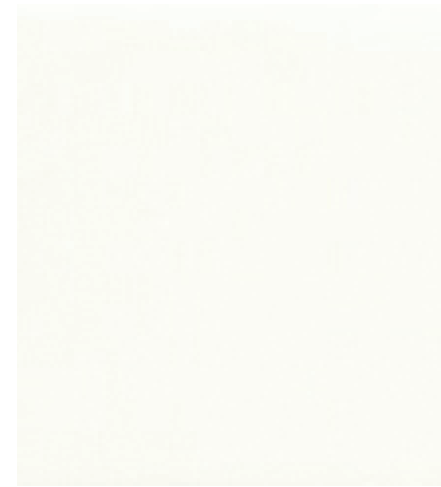

Pure White



Coconut Milk



Ash Rose



Aqua



Blue Stone



Forest



Mineral Grey




Obsidian

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.



2.5" x 10" Picket in Blue Stone

Features	Test Method	Value
Dimensions / Surface Properties	UNE - EN 14411	Pass
Water Absorption	EN ISO 10545 - 3	< 0.5%
Flexion Resistance	EN ISO 10545 - 4	≥ 35 N/mm ²
Abrasion Resistance	EN ISO 10545 - 7	3
Thermal Shock Resistance	EN ISO 10545 - 9	Resistant
Cracking Resistance	EN ISO 10545 - 11	
Frost Resistance	EN ISO 10545 - 12	
Acid Resistance	EN ISO 10545 - 13	GLA
Alkali Resistance		GHA
Cleaning Product Resistance		GA
Swimming Pool Chemical Resistance		GA
Stain Resistance	EN ISO 10545 - 14	5
Slip Resistance (Rd)	UNE-41901:2017EX	Class 2
Slip Resistance (R)	DIN 51130	R10 (Matte)
Slip Resistance (DCOF)	ANSI A137.1	> 0.42 (Matte)
Recycled Material	-	34%
		Low Emissions Material • Zero VOC

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer: DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

Product Info:

- Glazed Porcelain Tile
- Matte | Shiny Finishes
- 8.2mm Thickness
- Pressed Edge
- V3 - Moderate Variation
- Frost Resistance = Yes





www.genrose.com