

# PIAZZA

 GENROSE

For the most up-to-date product information, scan the QR code.





3" x 3" Floor/Wall Tile in Bianco di Asiago | Rosa Perlino





3" x 3" | 3" x 12" Floor/Wall Tile in Carrara  
12" x 12" Floor/Wall Tile in Nero Marquina



3" x 12" Floor/Wall Tile in Nero Marquina





3" x 3" Floor/Wall Tile in Verde Alpi | Carrara



12" x 12" Floor/Wall Tile in Bianco di Asiago | Rosa Perlino



## AVAILABLE STOCKED ITEMS:

10mm Floor/Wall Tiles - Rectified Edge		
SIZE	FINISH	COLORS
3" x 3"	Matte	Carrara   Bianco di Asiago   Rosa Perlino   Verde Alpi   Nero Marquina
3" x 12"	Matte	Carrara   Bianco di Asiago   Rosa Perlino   Verde Alpi   Nero Marquina
12" x 12"	Matte	Carrara   Bianco di Asiago   Rosa Perlino   Verde Alpi   Nero Marquina

All sizes are Nominal




3" x 12" Floor/Wall Tile in Bianco di Asiago | Rosa Perlino




**Carrara**




**Bianco di Asiago**

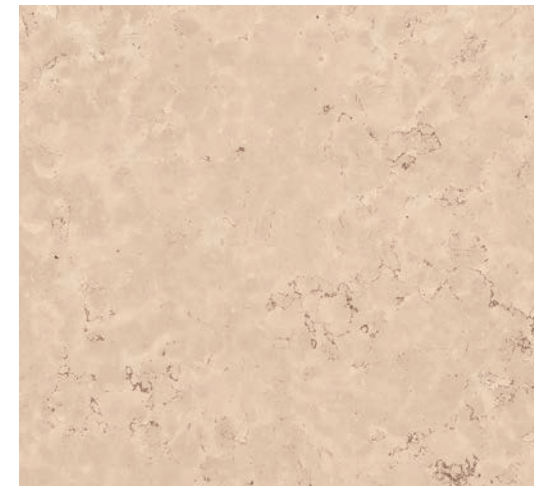

**Rosa Perlino**

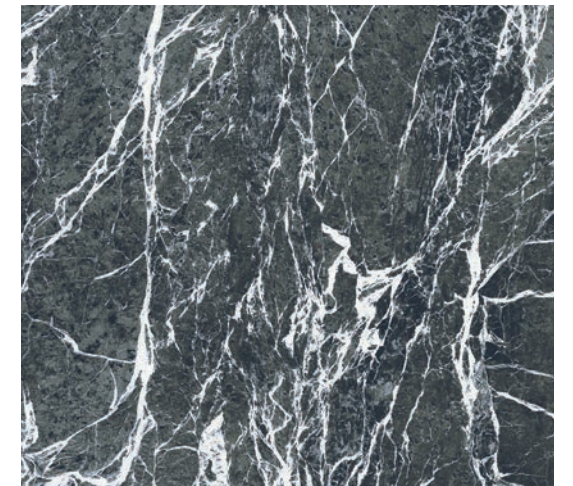

**Verde Alpi**

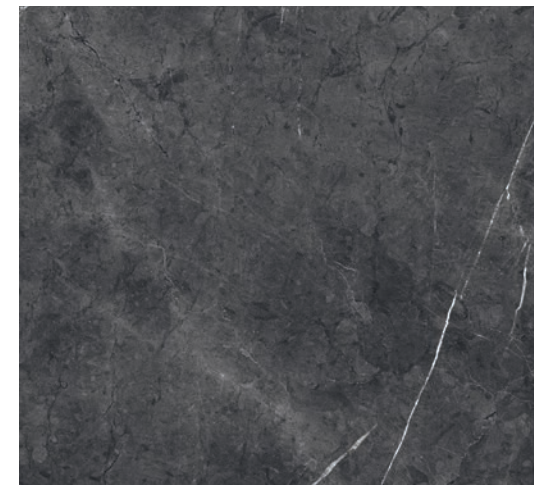

**Nero Marquina**

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.





3" x 3" Floor/Wall Tile in Carrara | Nero Marquina

Features	Test Method	Value
Length and Width	ISO 10545-2	Compliant
Thickness		Compliant
Straightness of Sides		Compliant
Rectangularity		Compliant
Surface Flatness		Compliant
Surface Quality		Compliant
Warpage	ISO 10545-2	Compliant
Wedging	ISO 10545-2	Compliant
Water Absorption	ISO 10545-3	< 0.5%
Modulus of Rupture / Bending Strength	ISO 10545-4	> 35 N/mm <sup>2</sup>
Breaking Strength	ISO 10545-4	> 1300 N
Surface Hardness (Mohs)	UNI EN - 101	7
Resistance to Surface Abrasion	ISO 10545-6	< 150 mm <sup>3</sup>
Coefficient of Linear Thermal Expansion	ISO 10545-8	< 9MK <sup>-1</sup>
Thermal Shock Resistance	ISO 10545-9	Resistant
Frost Resistance	ISO 10545-12	Resistant
Chemical Resistance (Domestic)	ISO 10545-13	UA
Chemical Resistance (Low Concentration)		ULA-ULB
Chemical Resistance (High Concentration)		UHA-UHB
Stain Resistance	ISO 10545-14	Class 5
Slip Resistance	ANSI A326.3: 2021	D.C.O.F 0.60
Recycled Content	-	> 20%



This product will contribute to USGBC registered LEED projects.  
It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

**Disclaimer:** DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

**Product Info:**

- Porcelain Tile
- Rectified Edge
- Matte Finish
- V2 - Slight Shading Variation
- 10mm Thickness
- Frost Resistance = Yes





[www.genrose.com](http://www.genrose.com)