POMPANO









24" x 48" Floor/Wall Tile in Rope

AVAILABLE STOCKED ITEMS:

9mm Floor/Wall Ti	les - Rectified	Edge	
SIZE	FINISH		COLORS
4" × 12"	Natural		Pure Rope Fog
24" × 24"	Natural		Pure Rope Fog
Floor/Wall Mosaic	- Rectified Edg	е	
SHEET SIZE	ТҮРЕ	FINISH	COLORS
12" x 12"	2" x 2" Mosaic	Natural	Pure Rope Fog


SPECIAL ORDER ITEMS:

9mm Floor/Wall Tile	es - Rectified Edge		
SIZE	FINISH	COLORS	
4" × 12"	Natural	Ocean Grey Fossil	
12" × 24"	Natural	Pure Rope Ocean Grey Fossil Fog	
24" × 24"	Natural	Ocean Grey Fossil	
24" × 48"	Natural	Pure Rope Ocean Grey Fossil Fog	
24" × 48"	Semi-Polished	Pure Rope Ocean Grey	
48" × 48"	Natural	Pure Rope Ocean Grey	
20mm Outdoor Pave	ers - Rectified Edge		
SIZE	FINISH	COLORS	
24" × 24"	Natural	Pure Rope Fossil	
24" × 48"	Natural	Pure Rope Fossil	
48" × 48"	Natural	Pure Rope Fossil	

MADE TO ORDER FIELD TILES AND MOSAICS:

Minimum quantity required. Contact your sales representative for more information.

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

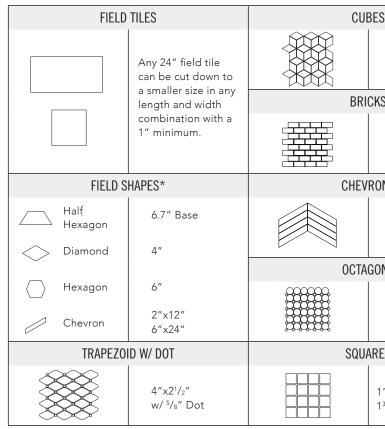

*Other sizes available upon request. All sizes are nominal.

All Sizes are Nominal.





S	BASKETWEAVE		
2" 4"		1³/8″x3″ 2″x4″	
ſS	DIAMONDS		
1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"	
ONS	HERRINGBONE		
2"x12"		1"x2" 2"x4" ⁵ /8"x4"	
ONS	HEXAGONS		
2" w/ 0.6" Squares		1 ¹ / ₈ " 2"	
RES	RECTANGLES		
1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"	

COLORS:






V2



2" x 2" MOSAIC







Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.





Features	Test Method	Value
Length and Width		Complies with ANSI A 137.1 TAB. 10
Thickness		
Straightness of Sides	ASTM C499	
Surface Flatness		
Rectangularity		
Surface Quality		>95%
Water Absorption	ISO 10545-3	≤0.05%
Modulus of Rupture / Bending Strength	ISO 10545-4	≥ 35 N/mm2
Breaking Strength	ISO 10545-4	≥ 1300 N
Surface Hardness (Mohs)	EN 101	7
Resistance to Surface Abrasion	ISO 10545-7	Class 4
Coefficient of Linear Thermal Expansion	ISO 10545-8	< 7.1 x 10 ⁻⁶ °C ⁻¹
Thermal Shock Resistance	ISO 10545-9	Resistant
Crazing Resistance	ISO 10545-11	Resistant
Frost Resistance	ISO 10545-12	Resistant
Chemical Resistance (Domestic)		A
Chemical Resistance (Low Concentration)	ISO 10545-13	LA
Chemical Resistance (High Concentration)		НА
Stain Resistance	ISO 10545-14	Class 5
Slip Resistance	ANSI A137.1	DCOF 0.56
Recycled Content	-	> 40%
VOC Emissions	-	Zero VOC

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer: DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

Product Info:

•

- Glazed Porcelain Tile •
- Natural | Semi-Polished Finishes • 9mm | 20mm Thicknesses
- PEI Rating = 4

• Rectified Edge

• Frost Resistance = Yes

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.

POMPANO

Glazed Porcelain Tile

It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.



www.genrose.com

www.genrose.com

