

STONEHENGE



For the most up-to-date product information, scan the QR code.





8" x 8" | 8" x 16" | 16" x 16" Floor/Wall Tile in Pieve



4" x 8" | 8" x 8" | 8" x 16" | 16" x 16" Floor/Wall Tile in Rosta Nuova

AVAILABLE STOCKED ITEMS:

Floor/Wall Tiles - Pressed Edge

| SIZE | FINISH | COLORS |
|-----------|---------|------------------------------|
| 8" x 8" | Natural | White Greige Beige Red |
| 8" x 16" | Natural | White Greige Beige Red |
| 16" x 16" | Natural | White Greige Beige Red |
| 16" x 24" | Natural | White Greige Beige Red |

Floor/Wall Mosaic

| SHEET SIZE | TYPE | FINISH | COLORS |
|------------|---------|---------|------------------------------|
| 12" x 12" | 3" x 3" | Natural | White Greige Beige Red |

All Sizes are Nominal.



Broletto



Due Maesta



Rosta Nuova





Pieve

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.

MODULAR PATTERNS


PATTERN 1

1 - 8x8 1 pcs 14.3%
 2 - 8x16 1 pcs 28.6%
 3 - 16x16 1 pcs 57.1%

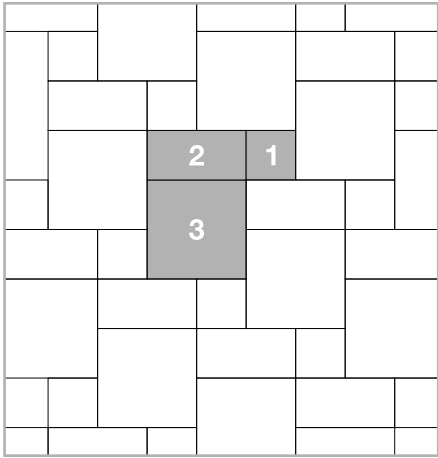


PATTERN 2

1 - 8x8 2 pcs 25%
 2 - 8x16 1 pcs 25%
 3 - 16x16 1 pcs 50%

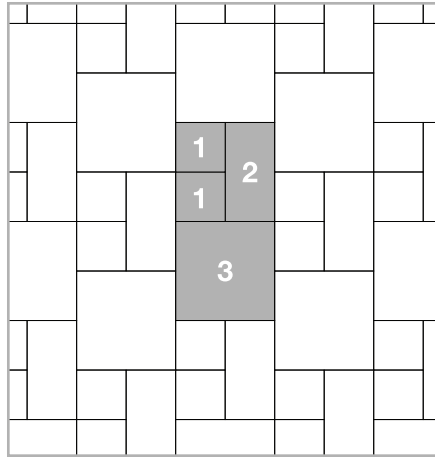


PATTERN 3

1 - 8x8 1 pcs 11.1%
 2 - 8x17 2 pcs 44.45%
 3 - 16x16 1 pcs 44.45%

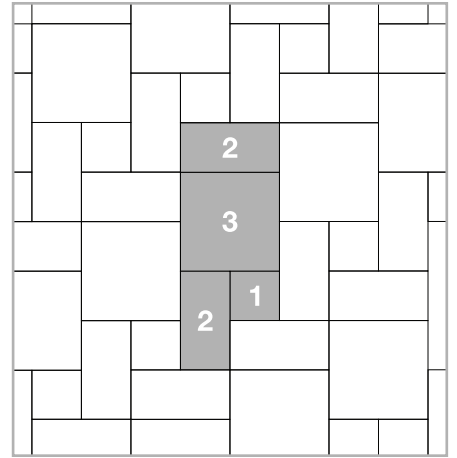


PATTERN 4

1 - 8x8 1 pcs 11.1%
 2 - 8x16 2 pcs 44.45%
 3 - 16x16 1 pcs 44.45%

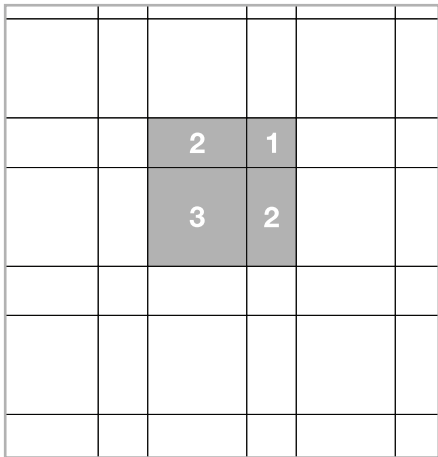


PATTERN 5

2 - 8x16 2 pcs 50%
 3 - 16x16 1 pcs 50%

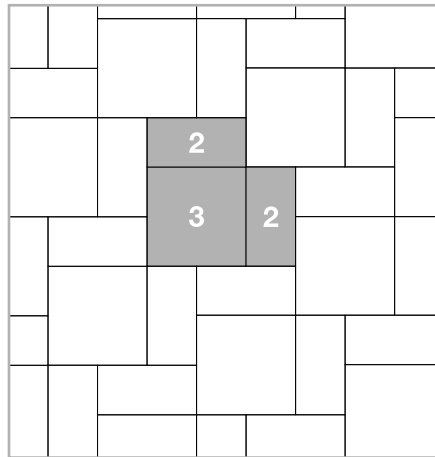

PATTERN 6

1 - 8x8 4 pcs 11.1%
 2 - 8x16 2 pcs 11.1%
 3 - 16x16 4 pcs 44.4%
 4 - 16x24 2 pcs 33.4%

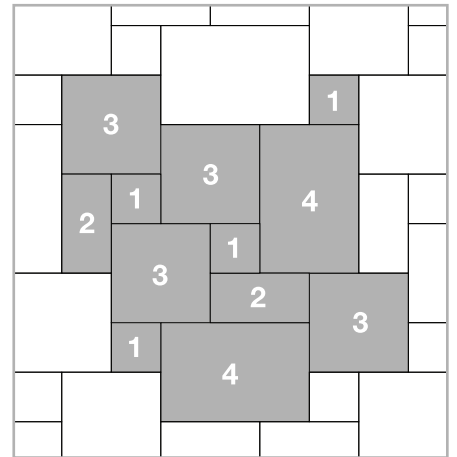

3" x 3" MOSAIC



Broletto



Due Maesta



Rosta Nuova




















Pieve

MADE TO ORDER FIELD TILES AND MOSAICS:

Minimum quantity required. Contact your sales representative for more information.

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

| FIELD TILES | | CUBES | | BASKETWEAVE | |
|--|---|---|--|---|--|
|  | Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum. |  | 2" 4" |  | 1 ³ / ₈ "x3" 2"x4" |
|  | | BRICKS | | DIAMONDS | |
| | |  | 1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4" |  | 2" |
| FIELD SHAPES* | | CHEVRONS | | HERRINGBONE | |
|  Half Hexagon | 6.7" Base |  | 2"x12" |  | 1"x2" 2"x4" 5 ¹ / ₈ "x4" |
|  Diamond | 4" | | | | |
|  Hexagon | 6" | OCTAGONS | | HEXAGONS | |
|  Chevron | 2"x12" 6"x24" |  | 2" w/ 0.6" Squares |  | 1 ¹ / ₈ " 2" |
| TRAPEZOID W/ DOT | | SQUARES | | RECTANGLES | |
|  | 4"x2 ¹ / ₂ " w/ 5 ¹ / ₈ " Dot |  | 1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3" |  | 1"x2" 1"x4" |

*Other sizes available upon request

| Features | Test Method | Value |
|---|--------------|-----------------------------|
| Length and Width | ISO 10545-2 | ± 0.5% ± 2mm |
| Thickness | ISO 10545-2 | ± 5% ± 0.5mm |
| Straightness of Sides | ISO 10545-2 | ± 3% ± 1.5 mm |
| Rectangularity | ISO 10545-2 | ± 3% ± 1.5mm |
| Surface Flatness | ISO 10545-2 | ± 0.5% ± 0.5mm |
| | ASTM C 485 | Warpage Diagonal/Edge ±0.4% |
| Water Absorption | ISO 10545-3 | ≤ 0.3% |
| Bending Strength | ISO 10545-4 | ≥ 35 N/mm ² |
| Breaking Strength | | ≥ 1300 N |
| Abrasion Resistance | ISO 10545-7 | Class 4 |
| Coefficient of Linear Thermal Expansion | ISO 10545-8 | Test Method Available |
| Thermal Shock Resistance | ISO 10545-9 | Resistant |
| Crazing Resistance | ISO 10545-11 | Resistant |
| Frost Resistance | ISO 10545-12 | Resistant |
| Household Chemical Resistance | ISO 10545-13 | Class A |
| Acid and Base Resistance | | Class LA Class HA |
| Stain Resistance | ISO 10545-14 | Class 5 |
| D.C.O.F. (WET) Slip Resistance | ANSI A137.1 | 0.45 |
| <p>This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.</p> | | |

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer: DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

Product Info:

- Glazed Porcelain Tile
- Natural Finish
- Pressed Edge
- V4 - **Extreme** Variation
- Frost Resistance = Yes





www.genrose.com