

## **STONINGTON**





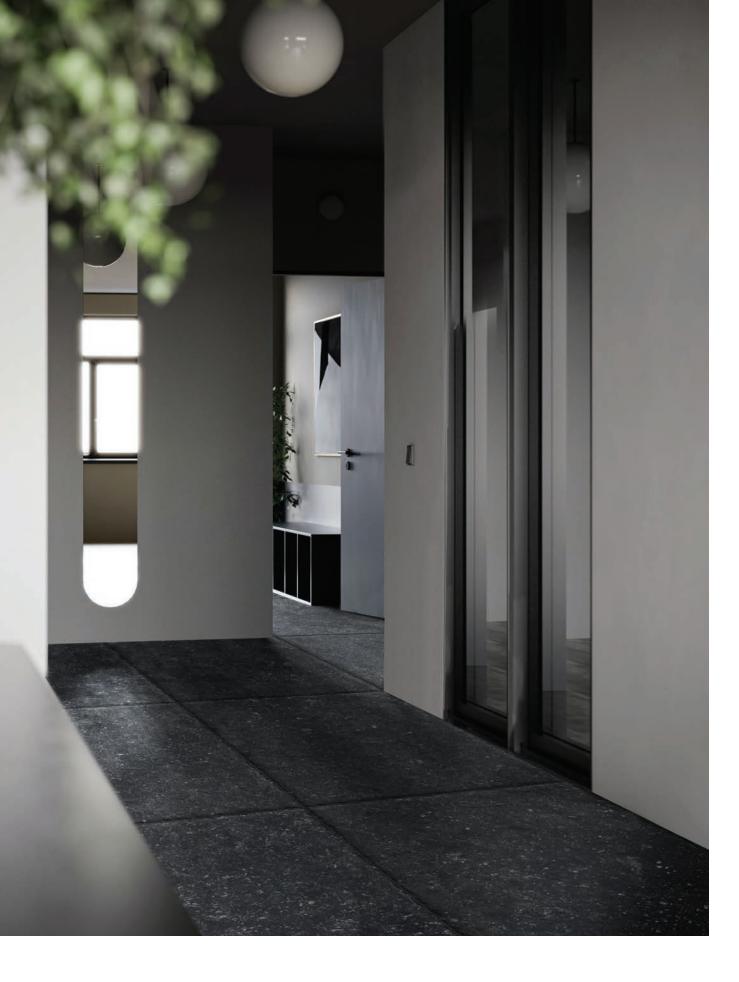

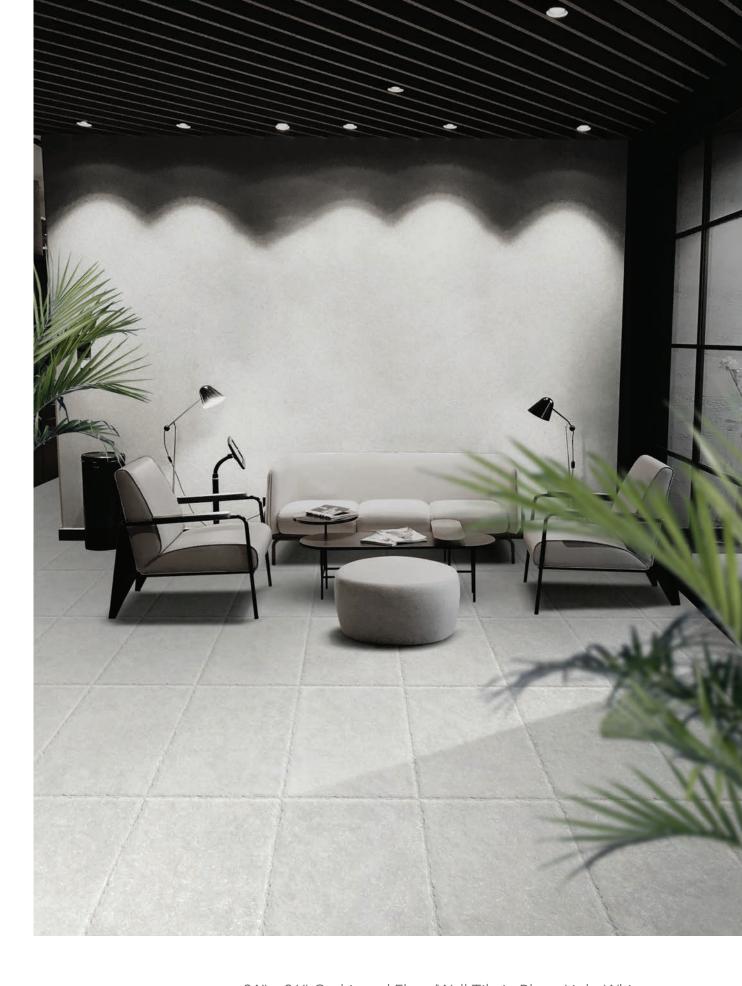


24" x 36" Cushioned Floor/Wall Tile in Bleue Blue


24" x 36" Cushioned Floor/Wall Tile in Bleue Light White


## **AVAILABLE STOCKED ITEMS:**

10mm Floor/Wall Tiles					
SIZE	TYPE	EDGE	FINISH	COLORS	
24" x 36"	Cushioned	Rectified	Matte	Bleue Light White   Bleue Grey   Bleue Bleue   Monolithica Cream	

All Sizes are Nominal.

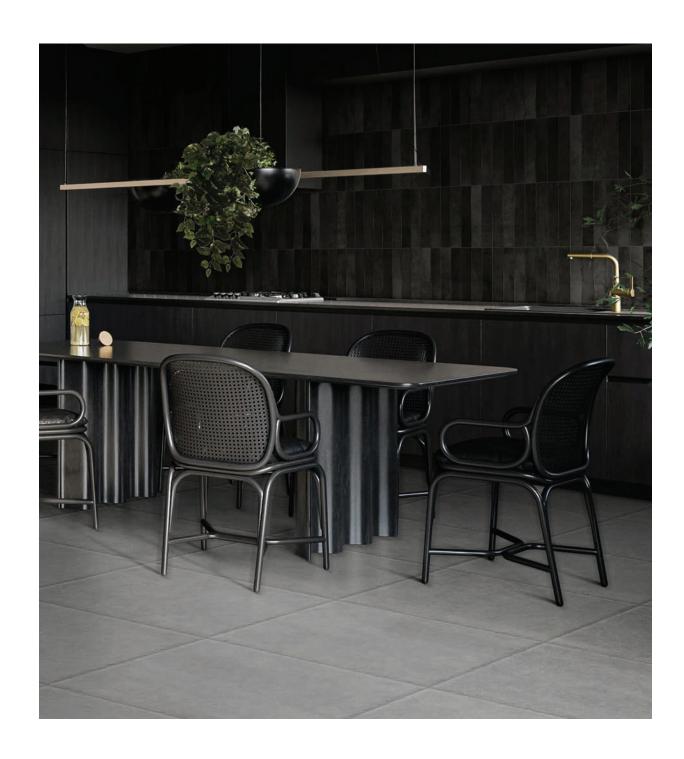

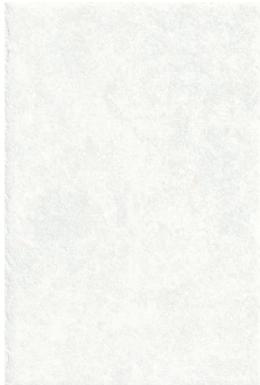





Bleue Blue



Bleue Grey



**Monolithica Cream** 





## STONINGTON Porcelain Tile

Features	Test Method	Value
Length and Width		Compliant
Thickness		Compliant
Straightness of Sides	100 40545 0	Compliant
Rectangularity	ISO 10545-2	Compliant
Surface Flatness		Compliant
Surface Quality		Compliant
Warpage	ASTM C485	Compliant
Wedging	ASTM C502	Compliant
Water Absorption	ISO 10545-3	<0.5%
Modulus of Rupture / Bending Strength	ISO 10545-4	> 35 N/mm2
Breaking Strength	-	> 1300 N
Surface Hardness (Mohs)	UNI EN - 101	7
Resistance to Surface Abrasion	ISO 10545-6	< 150 MM³
Coefficient of Linear Thermal Expansion	ISO 10545-8	<9MK <sup>-1</sup>
Thermal Shock Resistance	ISO 10545-9	Resistant
Frost Resistance	ISO 10545-12	Resistant
Chemical Resistance (Domestic)		UA
Chemical Resistance (Low Concentration)	ISO 10545-13	from ULA to ULB
Chemical Resistance (High Concentration)		From UHA to UHB
Stain Resistance	ISO 10545-14	Class 5
D.C.O.F. (WET) Slip Resistance	ANSI A137.1	0.62
Recycled Content	_	≥ 20%
VOC Emissions	_	NA

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.



## **Product Info:**

- Porcelain Tile
- Matte Finish
- 10mm Thickness
- Rectified Edge
- V3 Moderate Variation
- Frost Resistance = Yes



www.genrose.com



www.genrose.com